

SR17 series Isolating Fuse-switch

SPECIFICATIONS

Rated working current (A)	160	250	400	630
Rated heating current (A)	160	250	400	630
Suitable fuse size	00	1	2	3
Current voltage	AC 50Hz	AC 50Hz	AC 50Hz	AC 50Hz
Rated voltage (V)	690 500 400	690 500 400	690 500 400	690 500 400
Rated insulation voltage (V)	800			
Working frequency endurable voltage (V)	3000			
Using method	AC-21B (690V)			
	AC-22B (500V)			
	AC-23B (400V)			
Rated monnection capacity	725V, 240A	725V, 375A	725V, 600A	725V, 945A
	525V, 480A	525V, 750A	525V, 1200A	525V, 1890A
	420V, 1600A	420V, 2500A	420V, 4000A	420V, 6300A
Rated start break capacity	725V, 240A	725V, 375A	725V, 600A	725V, 945A
	525V, 480A	525V, 750A	525V, 1200A	525V, 1890A
	420, 1280A	420V, 2000A	420V, 4000A	420V, 5040A
Rated short circuit current (kA)	50 120 120	50 120 120	50 120 120	50 120 120
Fuse consumption rate (W)	12	23	34	48



SR17 160A



SR17 400A




SR17 630A

SWITCH AND SUITABLE FUSE

Switch rating heat currnt (A)	Fuse size	Rated current (A)
160	00	4, 6, 10, 16, 20, 25, 32, 35, 40, 50, 63, 80, 100, 125, 160
250	1	80, 100, 125, 160, 200, 224, 250
400	2	125, 160, 200, 224, 250, 300, 315, 355, 400
630	3	315, 355, 400, 425, 500, 630

DIMENSIONS

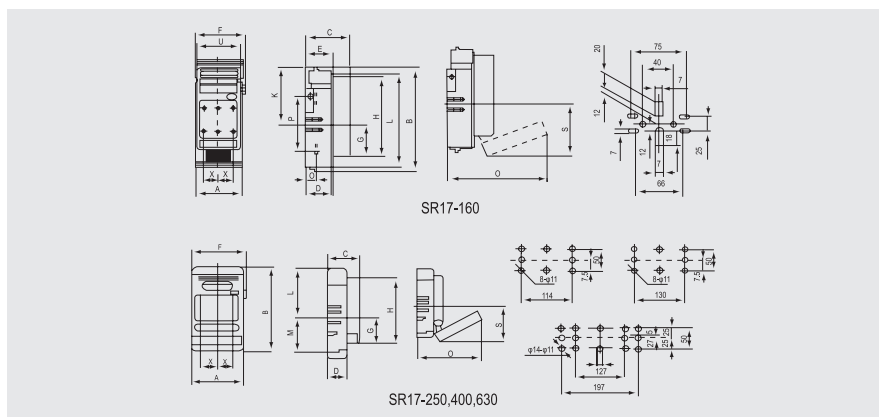

Type	A	B	C	D	E	F	G	H	K	L	M	O	P	Q
SR17-160	106	200	83	45	47.5	177	60	155	109	181	103	205	110	17
SR17-250	185	315	112.5	66		199	84	220	70	105	115	294	183	20
SR17-400	210	351	128	80		224	92	249	51.5	124	131	339	221	25
SR17-630	256	351	142.5	94.5		270	98.5	259	48	127.5	139.5	360	211	28