


PVC Trunking

SPECIFICATIONS

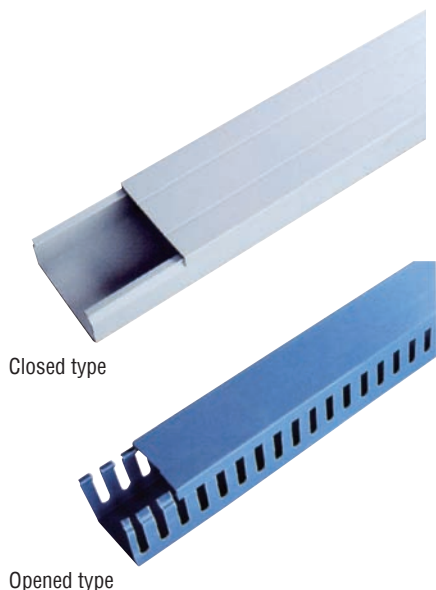

Closed type

Opened type

Size of PVC trunk open type & cosed type						White installation trunk		
20 x 15	30 x 350	40 x 30	50 x 40	60 x 35	80 x 50	10 x 15	20 x 30	30 x 100
20 x 20	30 x 40	40 x 40	50 x 45	60 x 45	80 x 55	10 x 20	20 x 35	50 x 80
20 x 25	30 x 50	40 x 50	50 x 50	60 x 50	80 x 60	10 x 25	20 x 50	50 x 100
25 x 25	35 x 25	45 x 45	50 x 55	60 x 55	80 x 80	15 x 15	25 x 40	80 x 100
30 x 15	35 x 30	50 x 20	50 x 60	60 x 60	80 x 100	15 x 20	30 x 50	100 x 100
30 x 20	35 x 35	50 x 25	50 x 80	60 x 100	100 x 80	15 x 25	30 x 60	
30 x 25	35 x 40	50 x 30	50 x 100	80 x 35	100 x 100	15 x 35	30 x 80	
30 x 30	40 x 50	50 x 35	60 x 25	80 x 45				

Note: above all spec. for: height x width; 2m/pcs or 1m/pcs

Round Type Wiring Duct


APPLICATION

Material: very impactful, rigid, self-extinguishing P. V. C

Service temperature: 85.

Backed with high quality double sided tape for permanent stick.

Good for floor with to facilitate trolley pass and to avoid trip.

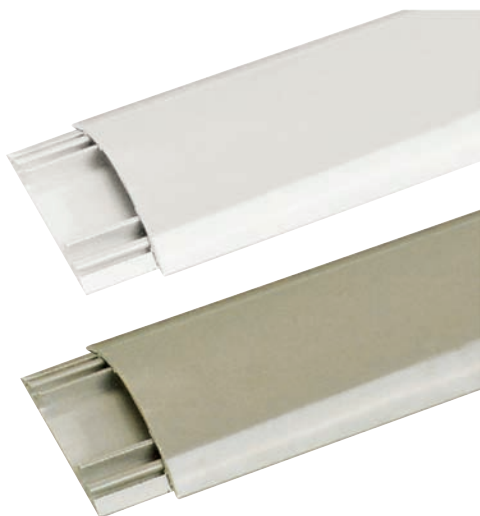

SPECIFICATIONS

Item. no	W	H	L	Color
RTD-1	24	8	1m	White grey green
RTD-2	31.7	8.5		
RTD-3	39.2	11.0		
RTD-4	52	11.3		
RTD-5	63	12.5		
RTD-6	70	13.2		

PVC Tape

SPECIFICATIONS

0.13mm x 19mm x 5YDS

0.13mm x 19mm x 10YDS

0.13mm x 19mm x 20YDS

0.13mm x 19mm x 10m

0.13mm x 19mm x 20m

0.15mm x 19mm x 10YDS

0.15mm x 19mm x 20YDS

0.13mm x 25mm x 10YDS

