

PG230 PG430 Earth Leakage Circuit Breaker

APPLICATION

PG230, PG430 breaker are suitable in AC 50Hz, 250/440V circuit with overload and earth leakage protection. The rated current is adjustable from 10A up to 60A. User can select suitable current to better protection against overload and short circuit. The products comply with NFC 61450.

TECHNICAL SPECIFICATION


Type	PG230	PG430	DBR230	DBR430	DDC230
Poles (P)	2P	4P	2P	4P	2P
Rated voltage (V)	250/440				
Rated current (A)	10, 15, 20, 25, 30, 45, 50, 60A Adjustable		5A-15A, 10-30A, 30-60A Adjustable		
Leakage motion current (mA)	300, 500		300	500	1000
Leakage dead current (mA)	150, 250		150	250	500
Accord with standard	NFC 61450				



PG230




PG430

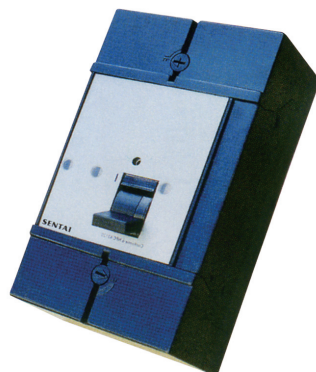

DBR430



DBR230

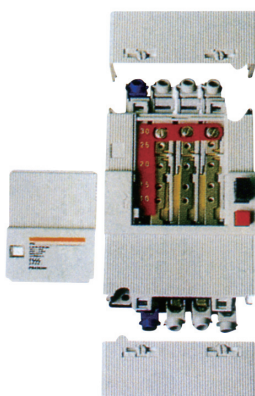

PG430 CKD



DDC230

