SENTAI

SEVERAL SEVERA

MY 1P

SENTAL MY160A 48278. 0.10 0.0FF 0 OFF

MY 2P



MY 3P

MY series Mini Circuit Breaker


APPLICATIONS

The products of MY belong to the advanced level of the nineties in the international instead of the older generation of MY. They have protective function for shortage and overload, and used in lighting distribution system in industry, commerce and dwelling, and protecting fractional electric motors. And they also have many merits like high protective grade (up to IP20), high breaking capacity, reliable sensitive action, convenient, multipole assembling, long life etc. They are mainly adapted to the circuit of AC 50Hz, 230V in single pole, 400V in double, three four poles for protecting overload and short circuit. Meanwhile, they are also used in turning on and off the electric apparatus and lighting circuit under the normal condition.

TECHNICAL SPECIFICATION

| Poles (P) | 1, 2, 3, 4 |
|--------------------------------|---|
| Rated voltage (V) | 230/400 |
| Mechanical and electrical life | (0-C) not less than 6000 oper ations |
| Rated current (A) | 1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63 |
| Protective grade | IP20 |
| Breaking capacity | IEC 60898 |

CHARACTERISTIC CURVE

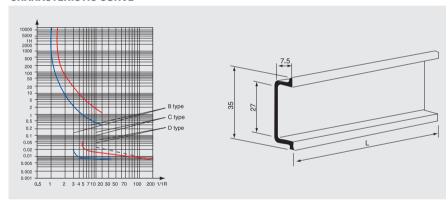

DIMENSIONS

